

~~RESTRICTED~~

RM No. E6J08

CLASSIFICATION CHANGED

LANGLEY SUB-LIBRARY

UNCLASSIFIED

NACA

To

J W Crowley per NACA
release form #2203

By authority of ~~ref. etc.~~ 10501 Date 12/17/53

amc 1-11-54

RESEARCH MEMORANDUM

for the

Bureau of Aeronautics, Navy Department

EFFECT OF FUEL COMPOSITION, ENGINE OPERATING VARIABLES, AND

SPARK-PLUG TYPE AND CONDITION ON PREIGNITION-LIMITED

PERFORMANCE OF AN R-2800 CYLINDER

By John F. Pfender

Aircraft Engine Research Laboratory
Cleveland, Ohio

CONTAINS PROPRIETARY
INFORMATION

CLASSIFIED DOCUMENT

This document contains classified information affecting the National Defense of the United States within the meaning of the Espionage Act, USC 5031 and 32. Its transmission or the disclosure of its contents in any manner to an unauthorized person is prohibited by law. Information so classified may be imparted only to persons in the military and naval services of the United States, appropriate civilian officers and employees of the Federal Government who have a legitimate interest therein, and to United States citizens of known loyalty and discretion who of necessity must be informed thereof.

TECHNICAL
EDITING
WAIVED

**NATIONAL ADVISORY COMMITTEE
FOR REFERENCE FOR AERONAUTICS**

WASHINGTON

NOT TO BE TAKEN FROM THIS ROOM

NOV 15 1946

Langley Field



NATIONAL ADVISORY COMMITTEE FOR AERONAUTICS

RESEARCH MEMORANDUM

EFFECT OF FUEL COMPOSITION, ENGINE OPERATING VARIABLES AND
SPARK-PLUG TYPE AND CONDITION ON PREIGNITION-LIMITED
PERFORMANCE OF AN R-2800 CYLINDER

By John F. Pfender

SUMMARY

The preignition characteristics of the R-2800 cylinder, as affected by fuel composition, engine operating variables, and spark-plug type and condition, were evaluated. The effects on preignition-limited performance of various percentages of aromatics (benzene, toluene, cumene, and xylene) in a base fuel of triptane were investigated. Two paraffins (triptane and S + 6.0 ml TEL/gal) and two refinery blends (28-R and 33-R) were preignition-rated. The effect of changes in the following engine operating variables on preignition limit was determined: inlet-air temperature, rear-spark-plug-gasket temperature, engine speed, spark advance, tappet clearance, and oil consumption. Preignition limits of the R-2800 cylinder using Champion C34S and C35S and AC-LS86, LS87, and LS88 spark plugs were established and the effect of spark-plug deterioration was investigated.

No definite trends in preignition-limited indicated mean effective pressure were indicated for aromatics as a class when increased percentages of different aromatics were added to a base fuel of triptane. Three types of fuel (aromatics, paraffins, and refinery blends) showed a preignition range for this cylinder from 65 to 104 percent when based on the performance of S plus 6.0 ml TEL per gallon as 100 percent. The R-2800 cylinder is therefore relatively insensitive to fuel composition when compared to a CFR F-4 engine, which had a preignition range from 72 to 100 percent for the same fuels.

Six engine operating variables were investigated with the following results: preignition-limited indicated mean effective

pressure decreased with increases in engine speed, rear-spark-plug-gasket temperature, inlet-air temperature, and spark advance beyond 20° B.T.C. and was unaffected by rate of oil consumption or by tappet clearance.

Spark plugs were rated over a range of preignition-limited indicated mean effective pressure from 200 to 390 pounds per square inch at a fuel-air ratio of 0.07 in the following order of increased resistance to preignition: AC-LS87, AC-LS88, Champion C35S, AC-LS86, and Champion C34S. Spark-plug deterioration in the form of cracks in the porcelain did not affect the preignition limit. When pieces of porcelain had been broken away from the center electrode and were retained in the spark-plug cavity, the preignition limit was decreased as much as 57 percent. When the broken pieces had been removed, the preignition limit increased from that of the undamaged porcelain as the weight of removed porcelain was increased.

INTRODUCTION

The preignition problem in aircraft engines has become more important as specific power output has increased. As knock limits have been raised through development of better fuels, in some cases, cylinder cooling has become marginal. The heat loading of cylinders is therefore rapidly reaching the limit where preignition rather than knock becomes the limiting factor.

Studies have been made using a CFR F-4 engine (references 1 and 2), a 17.6 engine (reference 3), and an O-1230 cylinder (reference 2), which have shown the preignition characteristics of various fuels in these engines when using an engine-heated hot spot. The effect of engine operating variables on the preignition-limited performance of a CFR engine (reference 4) and a 17.6 engine (reference 5) using an engine-heated hot spot have been recorded. Extensive work has also been done to establish a standard procedure for the determination of preignition ratings of aircraft spark plugs in the 17.6 engine (reference 6) and preignition ratings based on this method have been reported for many aircraft spark plugs.

The limitations of engine performance imposed by preignition resulting from an engine-heated hot spot, however, vary with the cylinder type for a given set of operating conditions because of differences in heat-transfer characteristics. The preignition rating of one cylinder type on an absolute basis with respect to fuels,

spark plugs, and engine operating variables, therefore, cannot be applied to another cylinder type; each type must be individually rated. At the request of the Bureau of Aeronautics, Navy Department, the performance limitations of the R-2800 engine that are imposed by preignition and possible methods of eliminating its destructive effects were investigated at the NACA Cleveland laboratory. The preignition characteristics of this air-cooled cylinder as affected by changes in fuel, engine operating variables, spark-plug type and condition were evaluated. The effect on preignition-limited performance of various percentages of aromatics (benzene, toluene, cumene, and xylene) in a base fuel of triptane was investigated. Two paraffins (triptane and S plus 6.0 ml TEL/gal) and two refinery blends (28-R and 33-R) were preignition-rated. The effect of changes in the following engine operating variables on preignition limit was determined: inlet-air temperature, rear-spark-plug-gasket temperature, engine speed, spark advance, tappet clearance, and oil consumption. Preignition limits of the R-2800 cylinder using Champion C34S and C35S and AC-1S86, 1S87, and 1S88 spark plugs were established and the effect of spark-plug deterioration was investigated.

APPARATUS

An R-2800-69 cylinder was mounted on a CUE crankcase and standard engine baffles were fitted to the cylinder. At the beginning of the investigation, difficulty was experienced with burned pistons (fig. 1) and fractured exhaust valves (fig. 2). Piston burning was eliminated by increasing the side clearance between the piston and the cylinder barrel 0.006 inch on the diameter. The exhaust-valve fractures occurred at the neck of the valve during engine operation at a rear-spark-plug-gasket temperature of 550° F and engine speed of 2600 rpm. These fractures were eliminated by installing a high-speed valve-gear assembly, which indicates that the exhaust valves had probably failed as a result of fatigue induced by a combination of high operating temperature and an exhaust-valve gear not suitable for high-speed operation.

The rear-spark-plug-gasket thermocouple was connected to an automatic potentiometer-type regulator, which controlled the cooling-air flow to maintain a constant gasket temperature. All other operating temperatures were measured with iron-constantan thermocouples and a self-balancing potentiometer. The combustion-air system consisted of a pressure-regulating valve, an orifice to measure the air flow, an air-heater unit, a surge tank, and a vaporization tank. The inlet-air temperature was measured by a thermocouple placed at the outlet of the surge tank. Fuel was injected

through a spring-loaded injection nozzle located in the top of the vaporization tank. The fuel flow was measured by calibrated rotameters.

Preignition was detected by means of a magnetostriction-type pickup unit used with a cathode-ray oscilloscope. An AC-LS87 spark plug was used as the engine-heated hot spot (except when different spark plugs were being rated) and was located in the rear spark-plug hole. The use of this spark plug as the hot spot was considered satisfactory because it was durable, gave reproducible results and was convenient to install.

Combustion-gas leakage through damaged AC-LS87 spark plugs was determined by sealing the spark-plug connector elbow, connecting the elbow to an inverted cylindrical graduate, and measuring the rate of gas leakage by timed water displacement.

Triptane plus 4.0 ml TEL per gallon was chosen as the base fuel for this investigation because it has a preignition limit very close to that of 28-R, a representative aviation fuel. The knock limit of the base fuel was high enough to assure that no runs would be limited by knock before preignition was encountered.

Data for fuels used in this program are listed in the following table:

Fuel	Tetraethyl lead (ml/gal)	Aromatic (percent)	Remarks
Benzene	4.0	100	1° C distillation range
Toluene	4.0	100	1° C distillation range
Cumene	4.0	100	Atlantic Refinery grade
Xylene	4.0	100	3° C distillation range, mixture of orthoxylene, metaxylene, and para- xylenes
S	6.0	0	- - - - -
Triptane	4.0	0	1° C distillation range from 5- to 90-percent point
28-R	4.5	10.1	Aromatic is all cumene
33-R	4.5	8.3	Aromatic is 23 percent cumene

All aromatic fuel blends in triptane were mixed on a volume basis and contained 4.0 ml TEL per gallon.

INVESTIGATION CONDITIONS AND PROCEDURE

The fixed engine operating conditions, except as each was investigated as the primary variable, were:

Compression ratio	6.75
Engine speed, rpm	2600
Inlet-air temperature, °F	260
Spark advance, both plugs, °B.T.C.	20
Oil-inlet temperature, °F	185
Rear-spark-plug-gasket temperature, °F.	425
Tappet clearance, inch	
Intake.	0.025
Exhaust	0.015
Oil consumption, pound per	
horsepower-hour	approx. 0.01
	(standard ring assembly)

Preignition-limited mixture-response curves for points at rich mixtures were obtained by setting the fuel flow and increasing the manifold pressure until cycles of early ignition were regularly encountered. The manifold pressure was then reduced slightly, until early ignition was only occasionally indicated on the oscilloscope trace and the cylinder cooling-air pressure drop remained steady. A continuous increase in cooling-air pressure drop without a change in engine operating conditions indicated an increase in cylinder temperatures resulting from more frequent cycles of early ignition and, therefore, indicated run-away preignition. Points at lean mixtures were obtained in the same manner except that the manifold pressure was set and the fuel flow increased to the preignition point. At a speed of 2600 rpm the point of incipient preignition was sharply defined while at lower engine speeds, this point was not as definite.

RESULTS AND DISCUSSION

Fuel composition. - The preignition-limited performance of an R-2800 cylinder as affected by various aromatic blends of benzene, toluene, cumene, and xylene in a base fuel of triptane is shown in figure 3. The data for the different fuel blends are plotted with the ratio of actual to stoichiometric fuel-air ratios for each blend as the abscissa to place them on a comparable basis. In order to compensate for small differences in the various AC-LS87 spark plugs used as hot spots and for engine deterioration, check points on triptane plus 4.0 ml TEL per gallon were taken at a fuel-air ratio of 0.08 at the beginning and end of each run. These check

points were then corrected to the basic indicated mean effective pressure of 225 pounds per square inch at a fuel-air ratio of 0.08; the fuel-blend data for that run were also corrected by the same amount. The average correction was about 5 pounds per square inch and the maximum was 15 pounds per square inch. All other data presented, however, were not corrected for the hot-spot variation.

The data of figure 4 indicate no common trend for aromatics as a class in the preignition-limited performance of the cylinder obtainable with various percentages of aromatics in the base fuel. The greatest reduction in the preignition-limited indicated mean effective pressure is obtained with the addition of benzene. If more than 60 percent of benzene is added to the base fuel, however, the preignition limit again increases slightly. Toluene shows no appreciable effect on the preignition rating of the cylinder until 75 percent is added to the base fuel; further addition of toluene increases the preignition limit sharply until at 100-percent toluene the preignition-limited indicated mean effective pressure is about 45 pounds per square inch above that obtained with 100-percent triptane. Cumene was the only aromatic investigated for which preignition-limited indicated mean effective pressure is inversely proportional to aromatic content. Pure cumene, however, lowers the preignition-limited indicated mean effective pressure only 20 pounds per square inch below that obtained with the base fuel. Xylene shows the smallest effect on the preignition rating of the cylinder.

The preignition limits of the four aromatics are compared with those of triptane, S plus 6.0 ml TEL per gallon, and 33-R in figure 5. Although 28-R could not be used at these conditions without knock, preliminary work showed that its preignition rating in the R-2800 cylinder is very slightly above that of triptane plus 4.0 ml TEL per gallon. The data representing the performance of 28-R fuel are therefore plotted by application of this correlation to data obtained with triptane plus 4.0 ml TEL per gallon. The preignition limits of the cylinder at two percentages of stoichiometric mixture and at one fuel-air ratio for four aromatics, two paraffins, and two refinery blends are presented in table I.

In order to compare the preignition rating of these fuels in the R-2800 cylinder with their performance in several other cylinders, table II has been compiled. Table III lists the engine operating conditions at which the data of table II were obtained. The ratings for fuels in the R-2800 cylinder are relative to S plus 6.0 ml TEL per gallon whereas in the O-1230 cylinder and the CFR F-4 engine the ratings are relative to S plus 4.0 ml TEL per gallon. Because the data of reference 2 indicate very little difference between the

preignition ratings of 8 plus 4.0 ml TEL per gallon and 8 plus 6.0 ml TEL per gallon, the difference in reference fuel has little effect on the comparison among engines. The preignition-limited performance of the R-2800 cylinder is less sensitive to the type of fuel used than are the O-1230 cylinder and the CFR F-4 engine. All of the fuels except toluene are in the same relative positions when rated in the several engines.

Engine operating variables. - In order to aid in the evaluation of the preignition characteristics of the R-2800 cylinder, the effects of engine operating variables on preignition-limited performance were investigated.

A linear relation exists between inlet-air temperature and preignition-limited power (fig. 6(a)). For each 100° F increase in inlet-air temperature, the preignition-limited indicated mean effective pressure decreased 20 pounds per square inch. The preignition-limited inlet-air pressure increased very slightly with increasing inlet-air temperature.

A linear relation also exists between rear-spark-plug-gasket temperature and preignition-limited power (fig. 6(b)). In this case, each 100° F increase in cylinder temperature decreased the preignition-limited indicated mean effective pressure 30 pounds per square inch.

When engine speed was changed, each increase of 100 rpm lowered the preignition-limited indicated mean effective pressure 6.5 pounds per square inch over the range covered (fig. 6(c)). Preignition-limited indicated horsepower, however, increased with increase in engine speed.

Preignition-limited indicated mean effective pressure changed very little when the spark was advanced from 0° to 20° B.T.C. (fig. 6(d)). Further advance of the spark decreased the preignition-limited indicated mean effective pressure 30 pounds per square inch for each 10° increase in spark advance.

In order to investigate the effect of residual gases on the preignition limit, the tappet-clearance cold setting was varied from 0 to 0.062 inch; the same clearance was used for the intake and the exhaust valves during each run. The resulting change in valve overlap had no effect on the preignition limit (fig. 6(e)).

The rate of oil consumption was changed to determine its effect on the preignition limit. Specific oil consumption at preignition-power level was measured first with the standard ring assembly and

then with the oil-scrapers and two oil-control rings removed. No change in preignition limit resulted from increased oil consumption (fig. 6(f)). It is interesting to note that, after 100 hours of operation under incipient preignition at normal engine operating conditions for this program (which included some advanced preignition while determining data points), the standard ring assembly still held the indicated specific oil consumption below 0.01 pound per horsepower-hour.

Many of the engine operating variables investigated in the R-2800 cylinder have been evaluated in the 17.6 engine (reference 5) and the F-4 engine (reference 1). Trends in the 17.6 engine were similar to those observed herein except that no appreciable change in preignition limit was noted for changes in jacket temperature; in general, the ranges covered in reference 5 were small. The F-4 engine also showed trends comparable to those of the R-2800 cylinder, except that no appreciable change in preignition limit accompanied engine speed changes and the spark-advance curve did not level off.

Spark-plug type and condition. - The types of spark plug chosen for preignition rating in the R-2800 cylinder were Champion C34S and C35S and AC-LS86, which are approved types for this cylinder; the cylinder was also rated with AC-LS87 and AC-LS88 spark plugs. The preignition-limited performance of these five spark plugs at a rear-spark-plug-gasket temperature of 550° F is shown in figure 7. Only the AC-LS87 and the AC-LS88 spark plugs could be rated at a rear-spark-plug-gasket temperature of 425° F because of limited cooling-air supply. The preignition ratings of the spark plugs in the R-2800 cylinder are compared in table IV with previously unpublished results obtained with a 17.6 engine. The spark plugs are rated in the same order in both cylinders except that the positions of Champion C34S and AC-LS86 spark plugs are reversed. The ratings of these two plugs, however, are approximately equal in both engines and variations in preignition limit of spark plugs of the same type could easily account for this discrepancy.

Because the preignition limits of new spark plugs are above that of the normal operating range, when a representative aviation fuel is used, the occurrence of preignition in service engines is due either to knock-induced preignition or deterioration of combustion-chamber parts. The engine parts that most commonly deteriorate and cause preignition are the spark plugs. Figure 8 shows that porcelain broken away from the center electrode of an AC-LS87 spark plug but retained in the spark-plug cavity reduced the preignition-limited indicated mean effective pressure as much as 57 percent. Cracking of the porcelain did not affect the preignition limit (crack not visible on

reproduced photograph of fig. 8) but when the porcelain became chipped and shattered and separated from the center electrode, the preignition-limited indicated mean effective pressure of the cylinder dropped sharply. The data of figure 8 represent runs on two AC-LS87 spark plugs. During these runs the maximum rate of gas leakage during engine operation was 2.0 cubic centimeters per minute. Reference 7, however, indicates that, if the center electrode insulation deteriorates in such a way that excessive gas leakage results (about 65 cc/min), the crack will cause an increase in the center electrode temperature of about 100° F with the result that the preignition limit will be lowered.

A further investigation was made to determine the effect on preignition limit of complete removal of the bits of broken porcelain. The preignition limit of the spark plug increased in proportion to the weight of porcelain removed (fig. 9). The porcelain is evidently the source of preignition in the spark plug and removal of part of it shortens the heat-flow path. The remaining portion of porcelain is therefore cooler at the same power level. Inasmuch as the data for figures 8 and 9 required disassembly and reassembly of the spark plug, the effect of this disassembly on preignition limit was investigated and found to be within the limits of reproducibility of the preignition data.

Reproducibility of preignition data. - The preignition limits of three AC-LS87 spark plugs were checked several times to establish the reproducibility of determination of the preignition limit of any one plug. An average variation in indicated mean effective pressure of 6 pounds per square inch was observed (fig. 10), which compared favorably with the reproducibility of knock-limit data.

Of further interest is the range of preignition limits encountered with spark plugs of one type. The preignition limits of 11 new AC-LS87 spark plugs selected at random from a large stock and used as engine-heated hot spots fall within a range of indicated mean effective pressure of 30 pounds per square inch (fig. 11). Four spark plugs that had been used and reconditioned several times were investigated; the maximum variation in observed preignition-limited indicated mean effective pressure was 22 pounds per square inch (fig. 11). The preignition limits for the four used plugs, however, were higher than the highest observed preignition limit of the new plugs of the same type.

In order to determine the reason for this higher level, several new AC-LS87 spark plugs were sand-blasted several times and the preignition limit determined after each sanding. Although no

definite increases were noted after successive reconditionings, the general trend of repeated sanding was to increase the preignition limit. Another interesting phenomenon observed during these runs, which would account for the higher preignition level of the four reconditioned plugs of figure 11, was the sudden increase of about 20 pounds per square inch indicated mean effective pressure in the preignition limit of new AC-LS87 spark plugs that occurred after the spark plugs had been in operation for an hour or two. The reason for this sudden increase in the preignition limit is not known.

It is therefore possible that either because the spark plugs were sanded several times or because they had been run an hour or more could account for the higher preignition limit of the reconditioned spark plugs.

SUMMARY OF RESULTS

The preignition characteristics of the R-2800 cylinder as affected by fuel composition, engine operating variables, and spark-plug type and condition can be summarized as follows:

1. Increased percentages of various aromatics added to triptane, the base fuel, showed no common trend in the preignition-limited indicated mean effective pressure for aromatics as a class. Benzene and cumene additions lowered the preignition-limited indicated mean effective pressure with benzene giving the greater reduction. Xylene additions did not affect the preignition-limited indicated mean effective pressure whereas toluene additions in large percentages increased the preignition-limited indicated mean effective pressure.
2. Three types of fuel (aromatics, paraffins, and refinery blends) showed a preignition range for this cylinder from 85 to 104 percent when based on the performance of S plus 6.0 ml TEL per gallon as 100 percent. The R-2800 cylinder is therefore relatively insensitive to fuel composition when compared to CFR F-4 engine, which had a preignition range from 72 to 100 percent for the same fuels.
3. Preignition-limited indicated mean effective pressure decreased with increases in engine speed, rear-spark-plug-gasket temperature, inlet-air temperature, spark advance beyond 20° B.T.C., and was unaffected by changes in oil consumption and in tappet clearance.

4. When the engine was operated with a fuel having preignition characteristics similar to those of aviation fuels, spark plugs, covering a range of preignition-limited indicated mean effective pressure from 198 to 390 psi at a fuel-air ratio of 0.07 were rated in the following order of increasing resistance to preignition: AC-LS87, AC-LS88, Champion C35S, AC-LS86, and Champion C34S.

5. Spark-plug deterioration in the form of cracks in the porcelain did not affect the preignition limit. If pieces of porcelain were broken away from the center electrode and retained in the spark-plug cavity, the preignition limit was lowered as much as 57 percent. If the broken pieces were removed, however, the preignition limit increased above the original limit as the weight of porcelain removed was increased.

Aircraft Engine Research Laboratory,
National Advisory Committee for Aeronautics,
Cleveland, Ohio.

John F. Pfender
John F. Pfender,
Mechanical Engineer.

Approved:

Arnold E. Biermann,
Mechanical Engineer.

John H. Collins, Jr.,
Mechanical Engineer.

jh

REFERENCES

1. Male, Donald W., and Evvard, John C.: Preignition-Limited Performance of Several Fuels. NACA ARR No. E5A11, 1945.
2. Jackson, J. L., Schramm, M. E., and Yust, V. E.: Preliminary Investigation of the Preignition Characteristics of Various Fuels. Rep. No. S-1223, Shell Oil Co., Inc., Dec. 12, 1944.
3. Heron, S. D., Felt, A. E., and Vaughn, G. A.: Preignition Studies. Rep. No. A.R. 99, Ethyl Corp., Aero. Res. Dept., March 15, 1944. (Revised, March 22, 1944).

4. Male, Donald W.: The Effect of Engine Variables on the Preignition-Limited Performance of Three Fuels. NACA TN No. 1131, 1946.
5. Felt, A. E.: Preignition Ratings of Aviation Spark Plugs. Rep. No. A.R. 109-M, Ethyl Corp., Aero. Res. Dept., Nov. 14, 1944.
6. Anon.: Test Procedures for Determining Preignition Ratings of Aircraft Spark Plugs in SC-17.6 Type Engine. No. A.R. 63, Ethyl Corp., Aero. Res. Dept., March 17, 1943.
7. Spencer, R. C., and Jones, A. W.: Knocking Tendency of an Air-Cooled Aircraft-Engine Cylinder with One and with Two Spark Plugs. NACA ARR No. 3G23, 1943.

TABLE I - PREIGNITION-LIMITED IMEP OBTAINED WITH
VARIOUS FUELS IN R-2800 CYLINDER

Fuel	Preignition-limited imep (lb/sq in.)		
	Ratios of actual to stoichiometric fuel-air ratios, percent		Fuel-air ratio of 0.08
	110	145	
Cumene	204	236	206
Benzene	204	249	206
Triptane	217	268	224
28-R	217	270	224
33-R	226	270	230
Xylene	218	276	224
S + 6.0 ml TEL/gal	238	292	243
Toluene	254	320	254

TABLE II - PREIGNITION-LIMITED IMEP OBTAINED WITH
VARIOUS FUELS IN THREE TYPES OF CYLINDER

Fuel	Reference preignition-limited imep at fuel-air ratio of 0.08 (percent)		
	R-2800 cylinder (a)	O-1230 cylinder (b)	F-4 engine (b)
S + 4.0 ml TEL/gal	-----	100	100
S + 6.0 ml TEL/gal	100	-----	-----
Benzene	85	-----	74
Toluene	104	-----	99
Cumene	85	69	72
Xylene	92	-----	98
28-R	92	-----	87
Triptane	92	-----	-----

^aReference preignition-limited imep is that obtained with S + 6.0 ml TEL/gal.

^bReference preignition-limited imep is that obtained with S + 4.0 ml TEL/gal. (Reference 2)

NATIONAL ADVISORY COMMITTEE
FOR AERONAUTICS

TABLE III - OPERATING CONDITIONS AT WHICH PREIGNITION LIMITS
WERE OBTAINED IN THREE TYPES OF CYLINDERS

Cylinder	Operating conditions				
	Engine speed (rpm)	Compression ratio	Spark advance ($^{\circ}$ B.T.C.)	Inlet-air temperature ($^{\circ}$ F)	Cylinder temperature ($^{\circ}$ F)
R-2800	2600	6.75	20	260	^a 425
^c O-1230	2680	6.5	30	175	^b 250
^c F-4	1800	6.0	45	225	^b 375

^aRear-spark-plug-gasket temperature.

^bCoolant-in temperature.


^cReference 2.

TABLE IV - PREIGNITION-LIMITED IMEP OBTAINED WITH
VARIOUS SPARK PLUGS IN R-2800 CYLINDER

Spark plug	Preignition-limited imep (lb/sq in.)	
	R-2800 cylinder at fuel-air ratio of 0.07	17.6 engine at maximum thermal-plug temperature (a)
AC-1S87	198	200
AC-1S88	252	240
Champion C35S	312	254
AC-1S86	384	330
Champion C34S	390	320


^aAverage ratings.

NATIONAL ADVISORY COMMITTEE
FOR AERONAUTICS

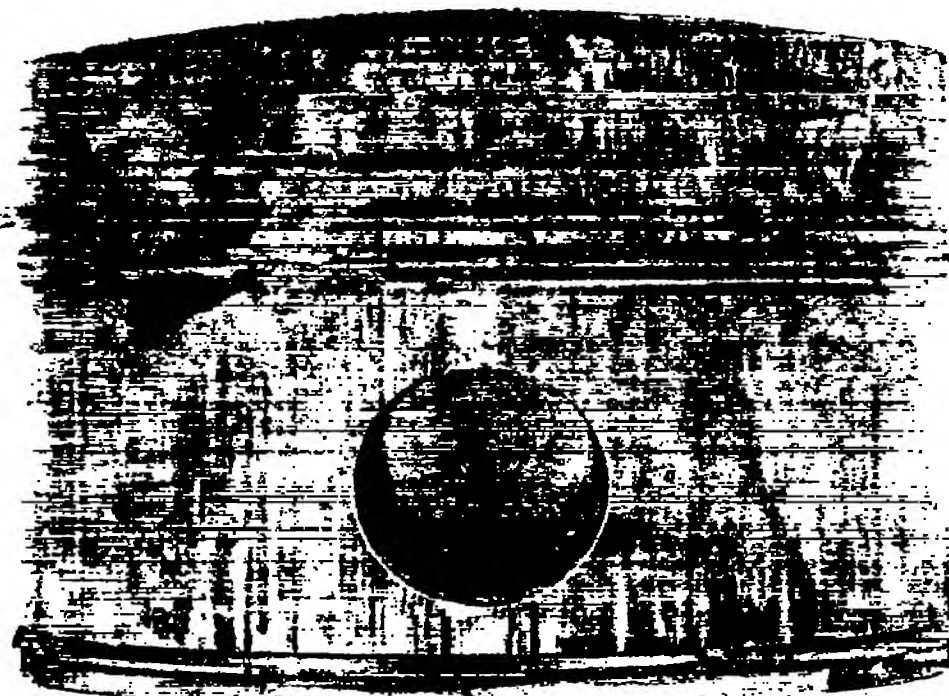

NACA
C-10478
6-4-45

Figure 1. - Burned piston resulting from engine operation under preignition conditions. Rear-spark-plug-gasket temperature, 550° F; standard piston clearances.

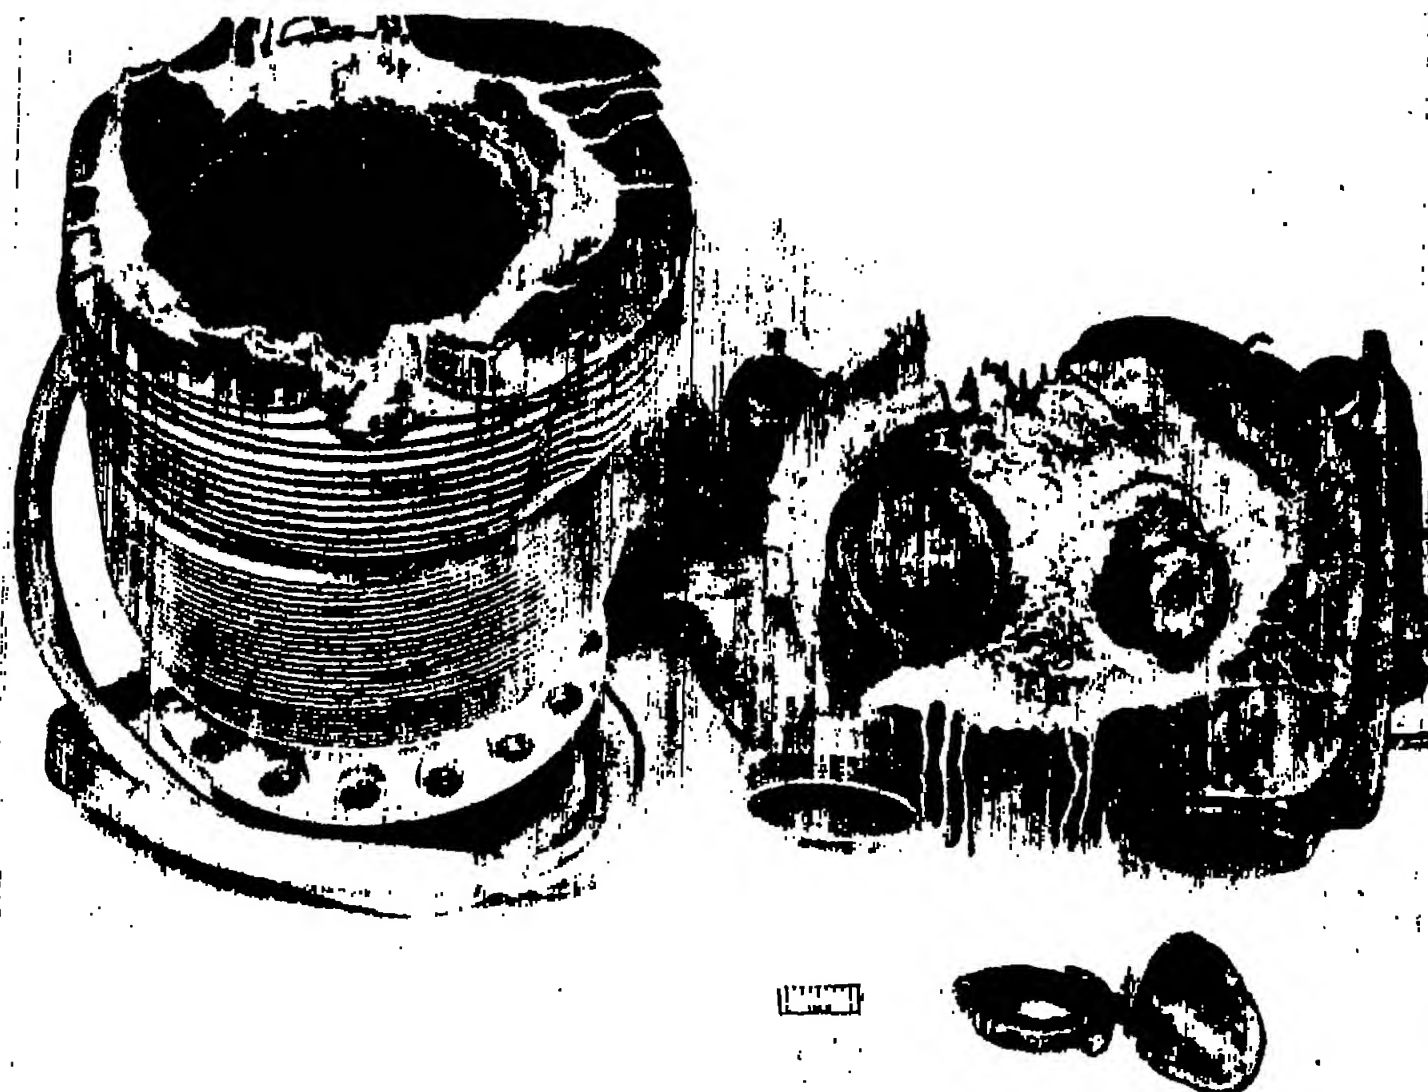

NACA
C-1089
6-25-45

Figure 2. - Damaged cylinder resulting from exhaust-valve fracture. Rear-park-plug-gasket temperature, 550°F ; engine speed, 2600 rpm.

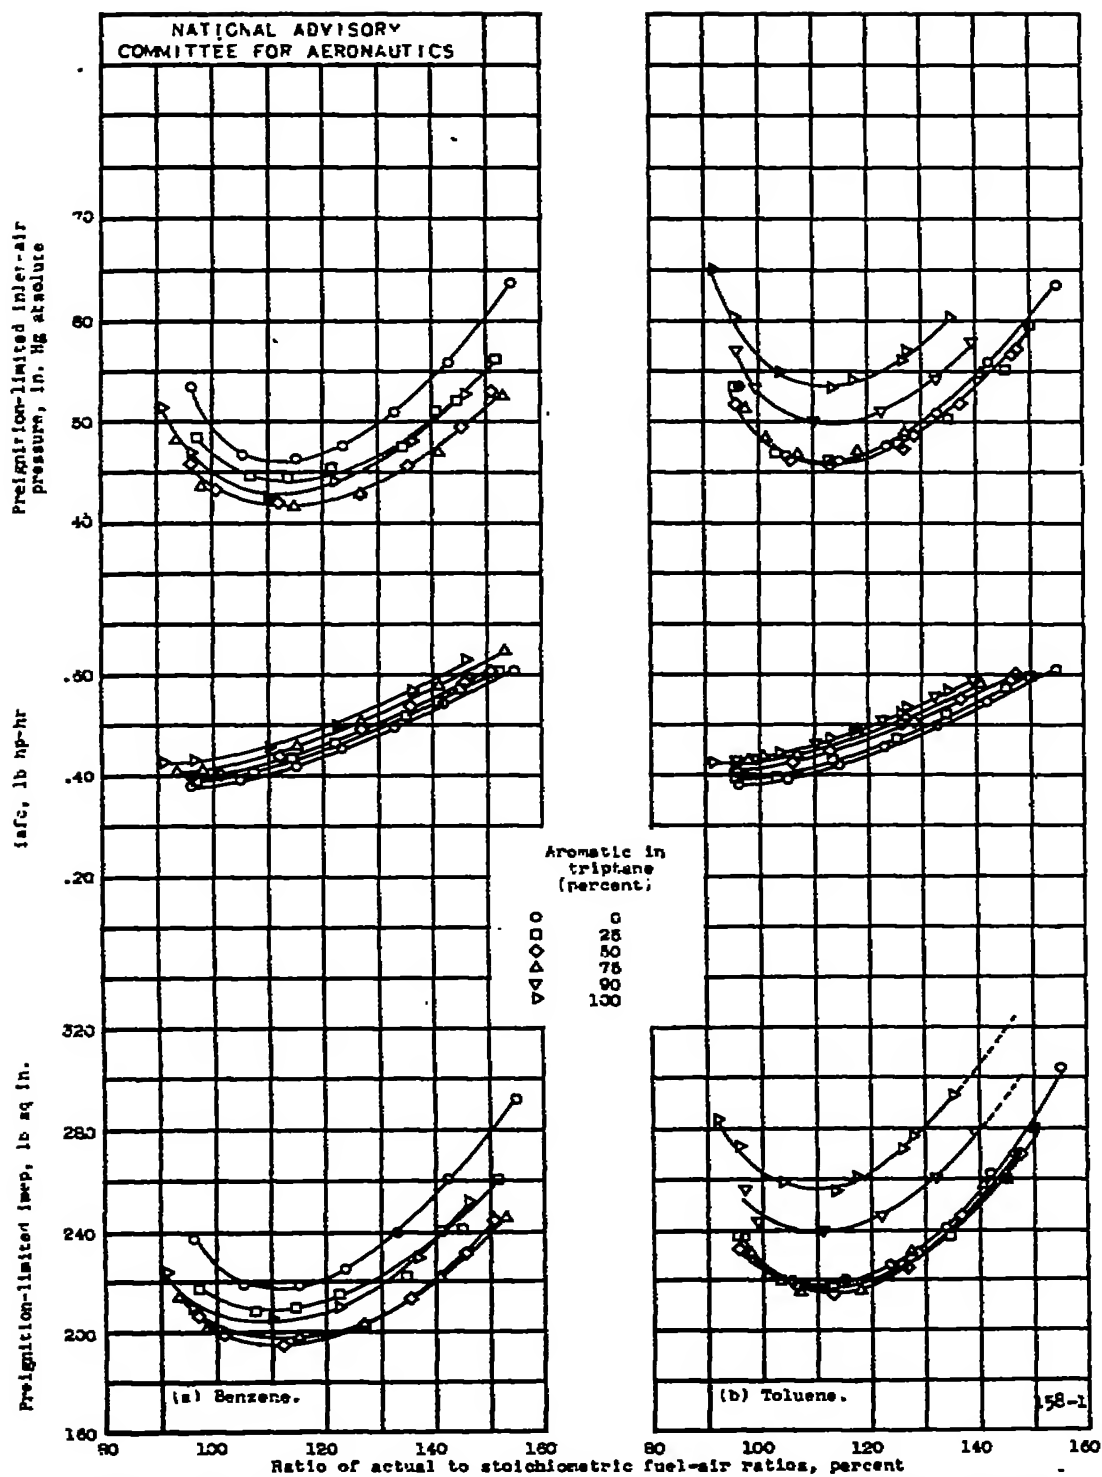


Figure 3. - Preignition-limited performance of blends of aromatics in triptane. All fuels contain 4.0 ml TEL per gallon. R-2800 cylinder; compression ratio, 6.75; spark advance, 20° B.T.C.; engine speed, 2600 rpm; inlet-air temperature, 260° F; rear-spark-plug-gasket temperature, 425° F.

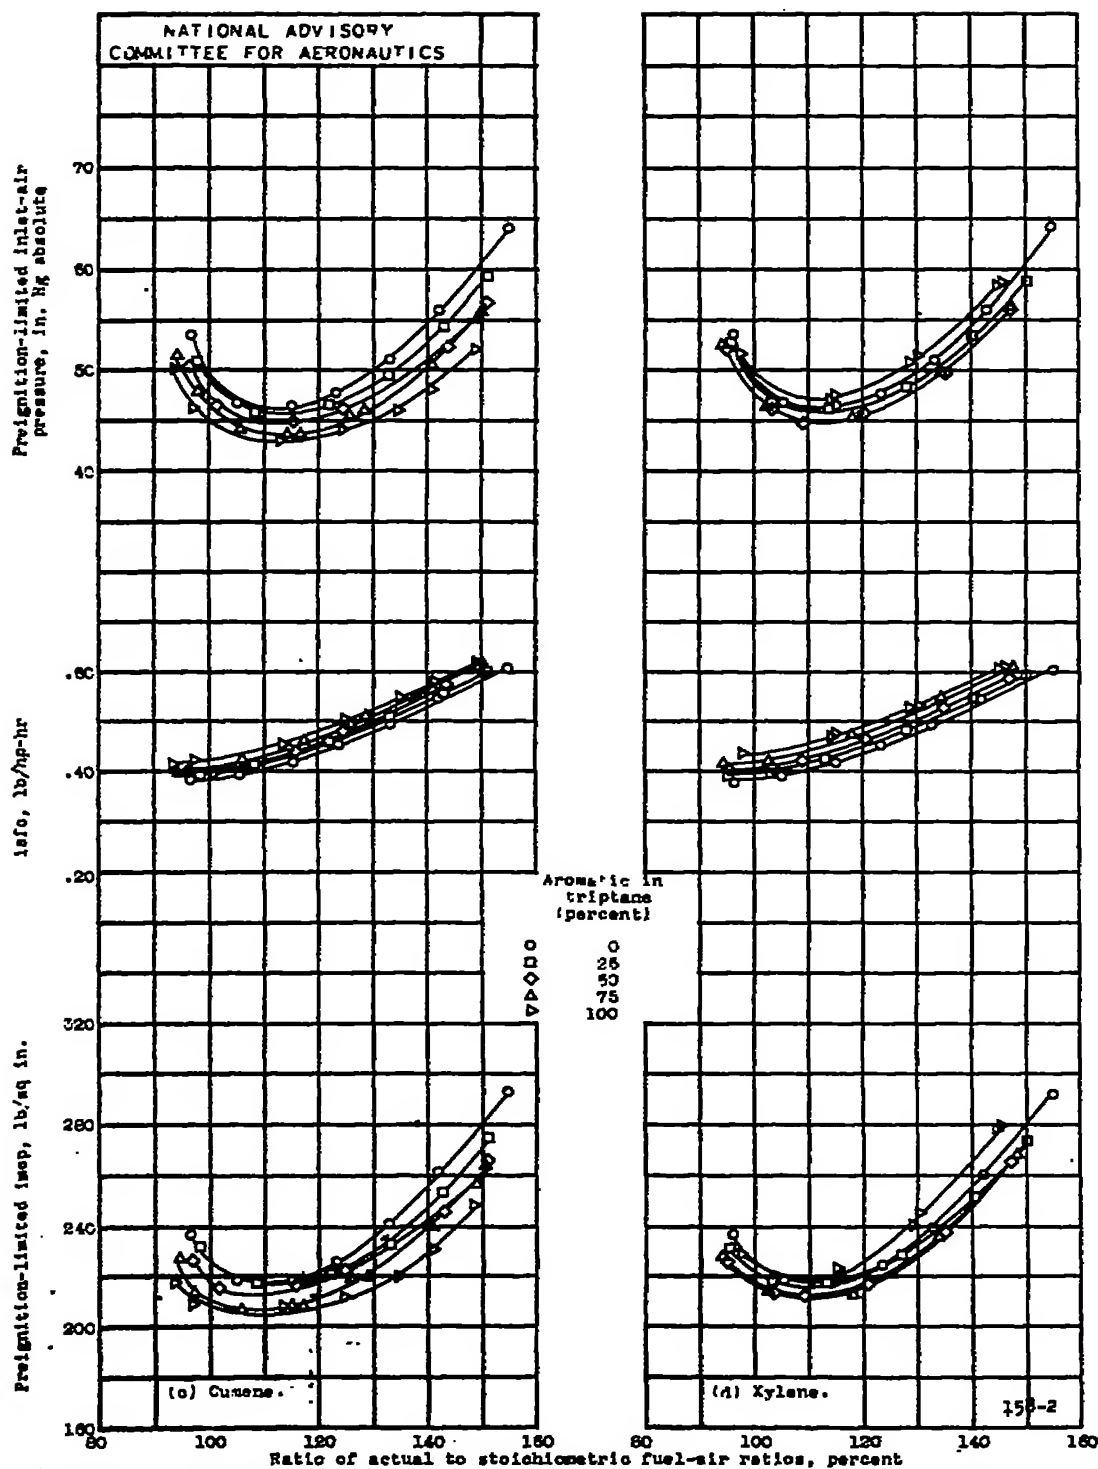


Figure 3. - Concluded. Preignition-limited performance of blends of aromatics in triptane. All fuels contain 4.0 ml TEL per gallon. R-2800 cylinder; compression ratio, .6.75; spark advance, 20° B.T.C.; engine speed, 2600 rpm; inlet-air temperature, 200° F; rear-spark-plug-gasket temperature, 425° F.

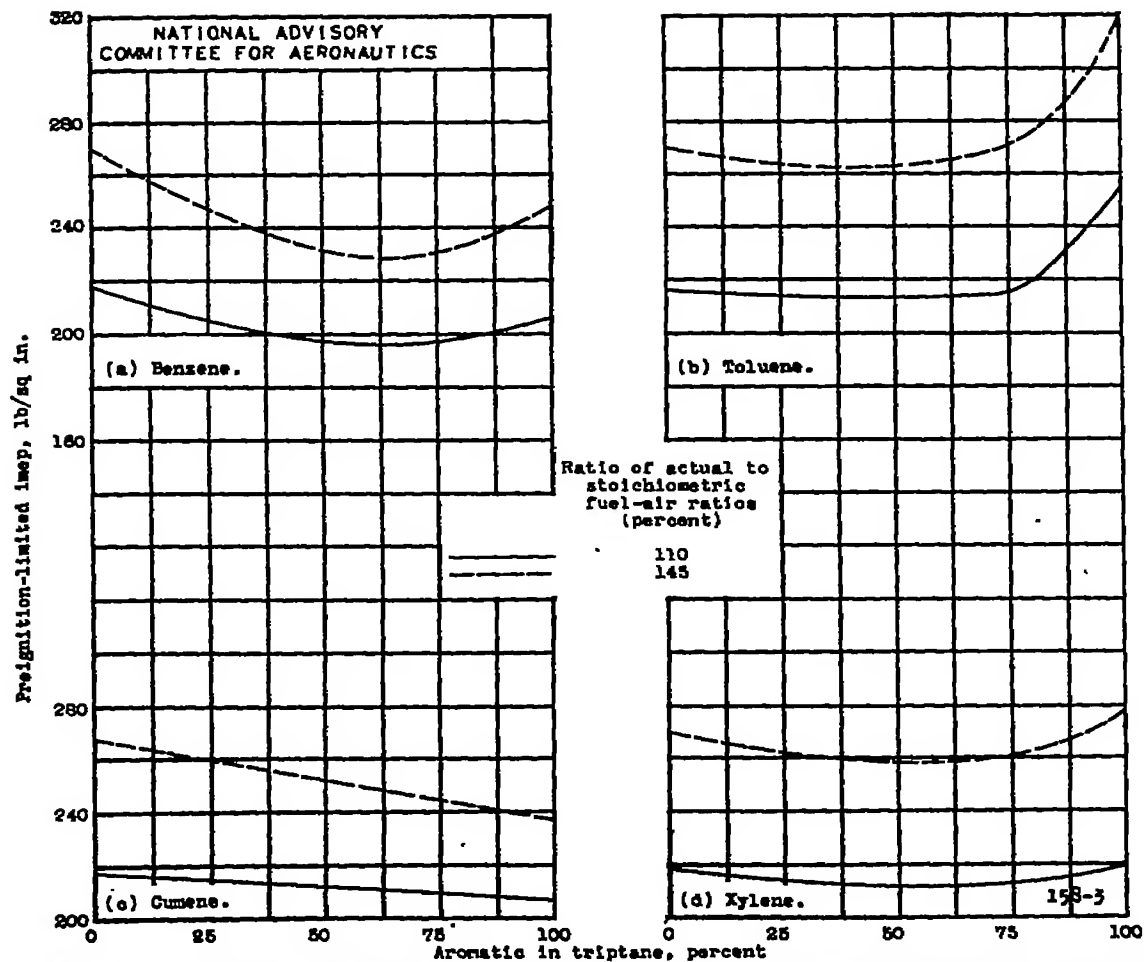


Figure 4. - Effect of aromatic content on preignition-limited indicated mean effective pressure at two mixture strengths. All fuels contain 4.0 ml TEL per gallon. R-2800 cylinder; compression ratio, 6.75; spark advance, 20° B.T.C.; engine speed, 2600 rpm; inlet-air temperature, 260° F; rear-spark-plug-gasket temperature, 425° F.

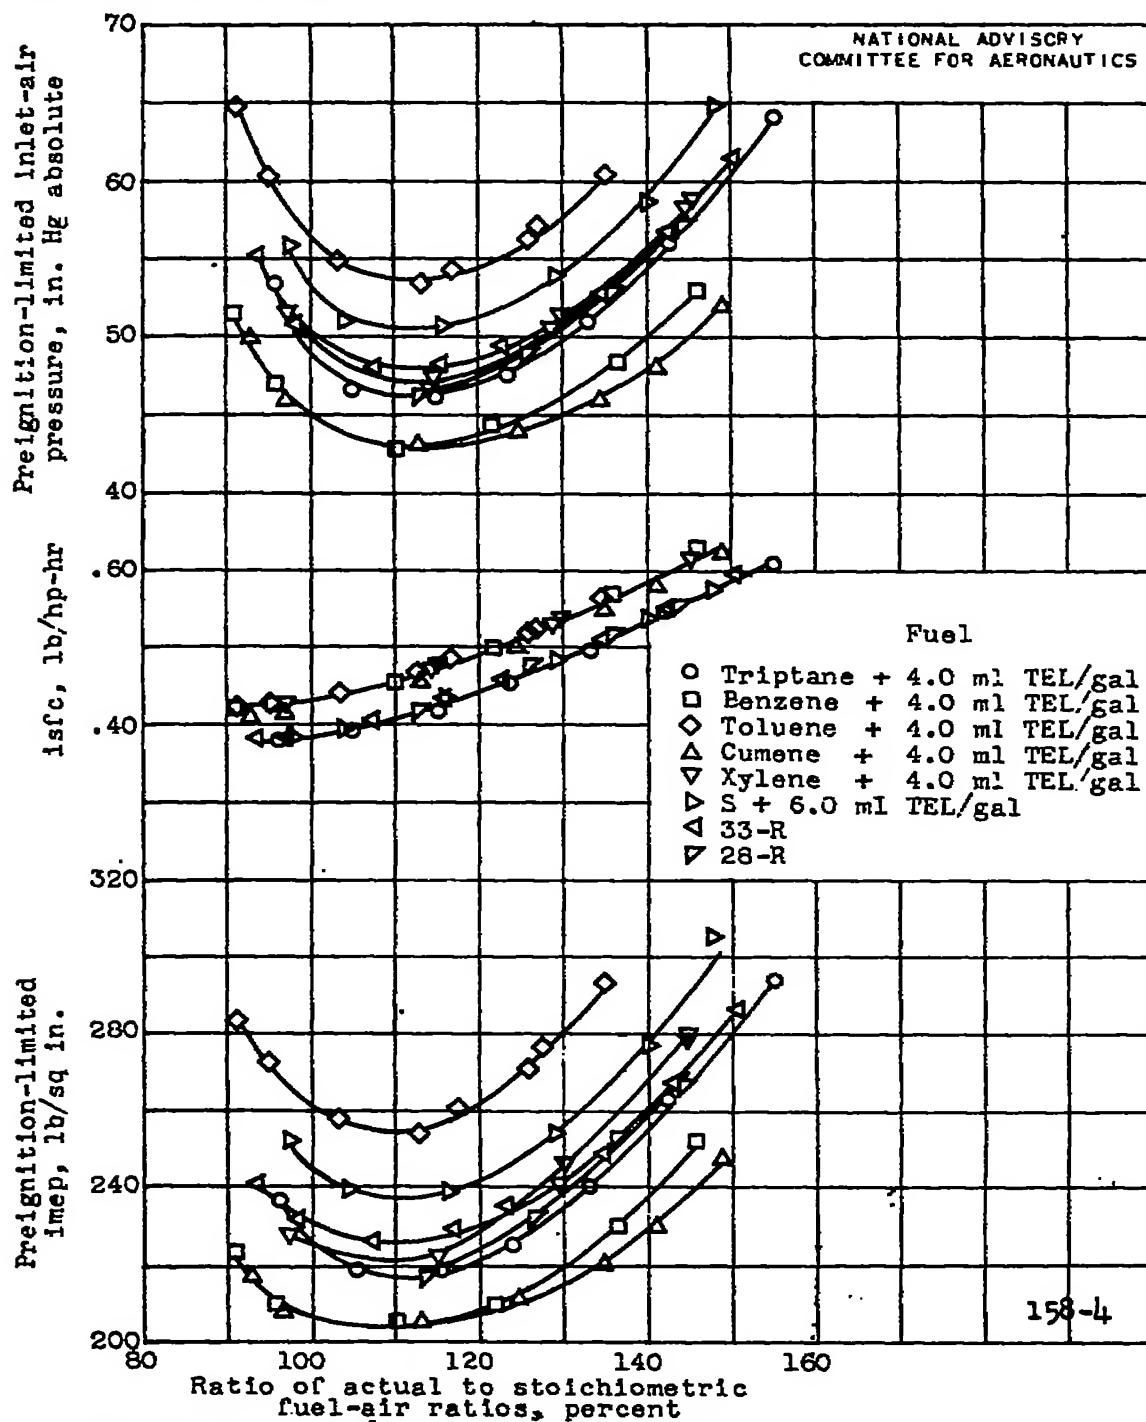


Figure 5. - Effect of fuel composition on preignition-limited performance, R-2800 cylinder; compression ratio, 6.75; spark advance, 20° B.T.C.; engine speed, 2600 rpm; inlet-air temperature, 260° F; rear-spark-plug-gasket temperature, 425° F.

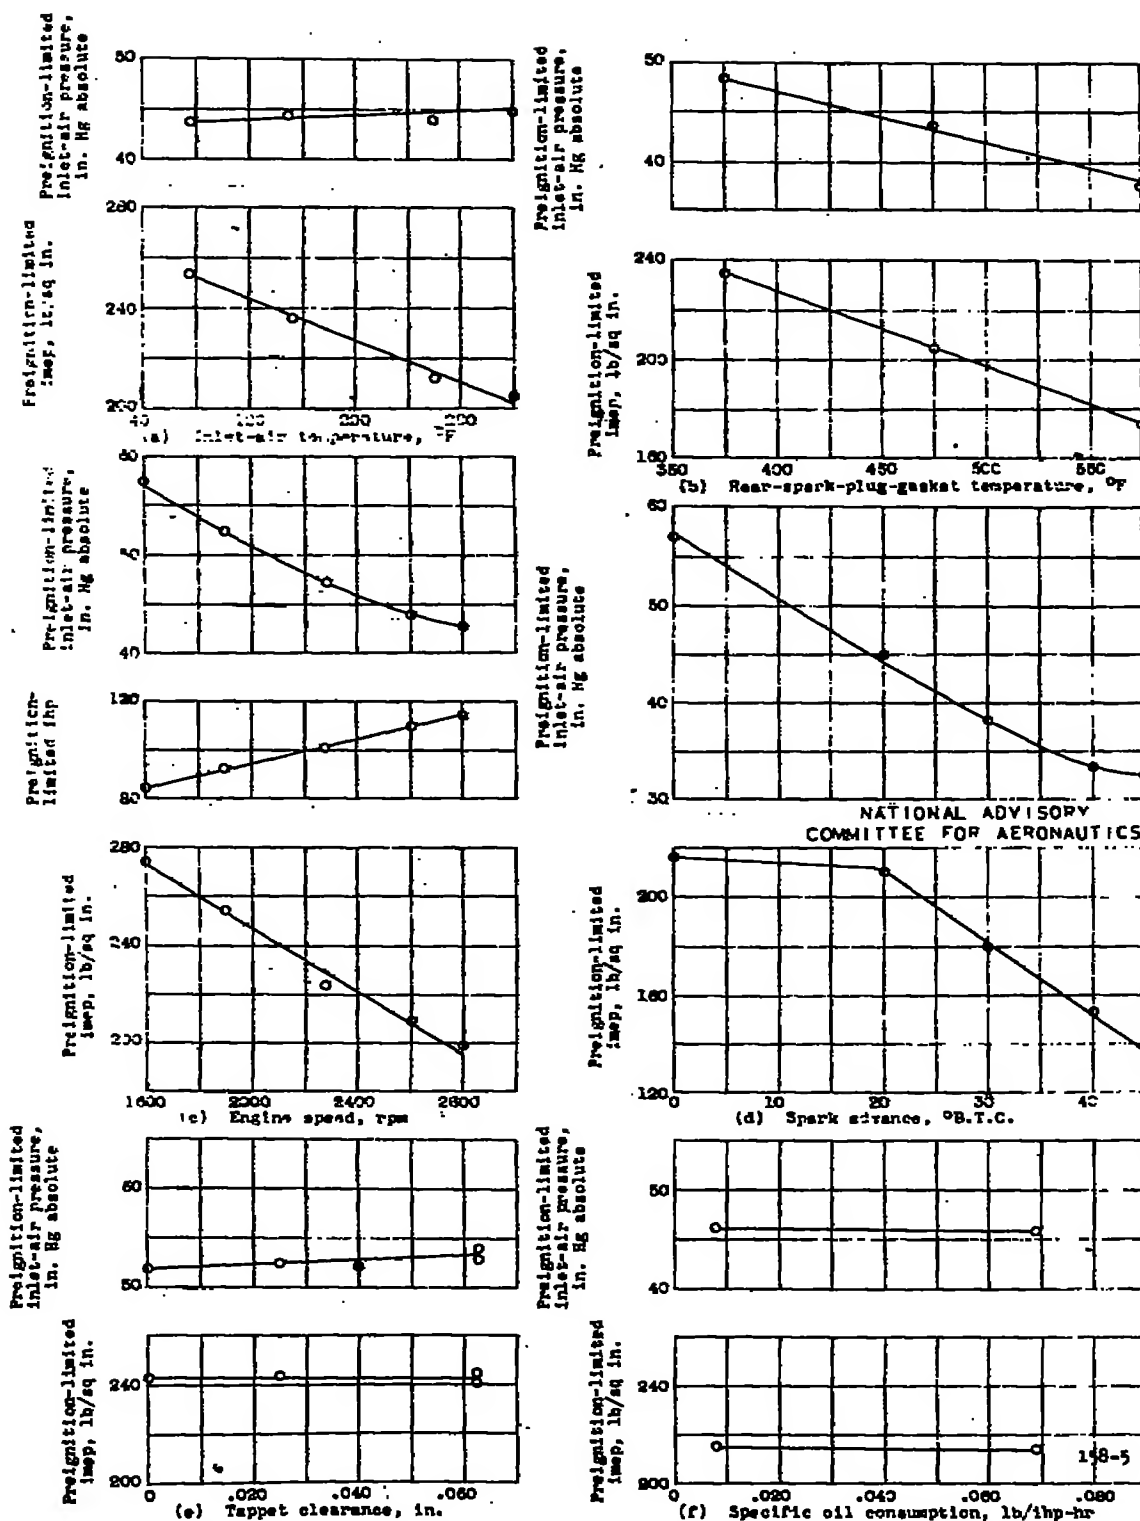


Figure 6. - Effect of six engine operating variables on preignition-limited performance. R-2800 cylinder; fuel-air ratio, 0.08; fuel, triptane + 4.0 ml TEL per gallon; compression ratio, 6.75.

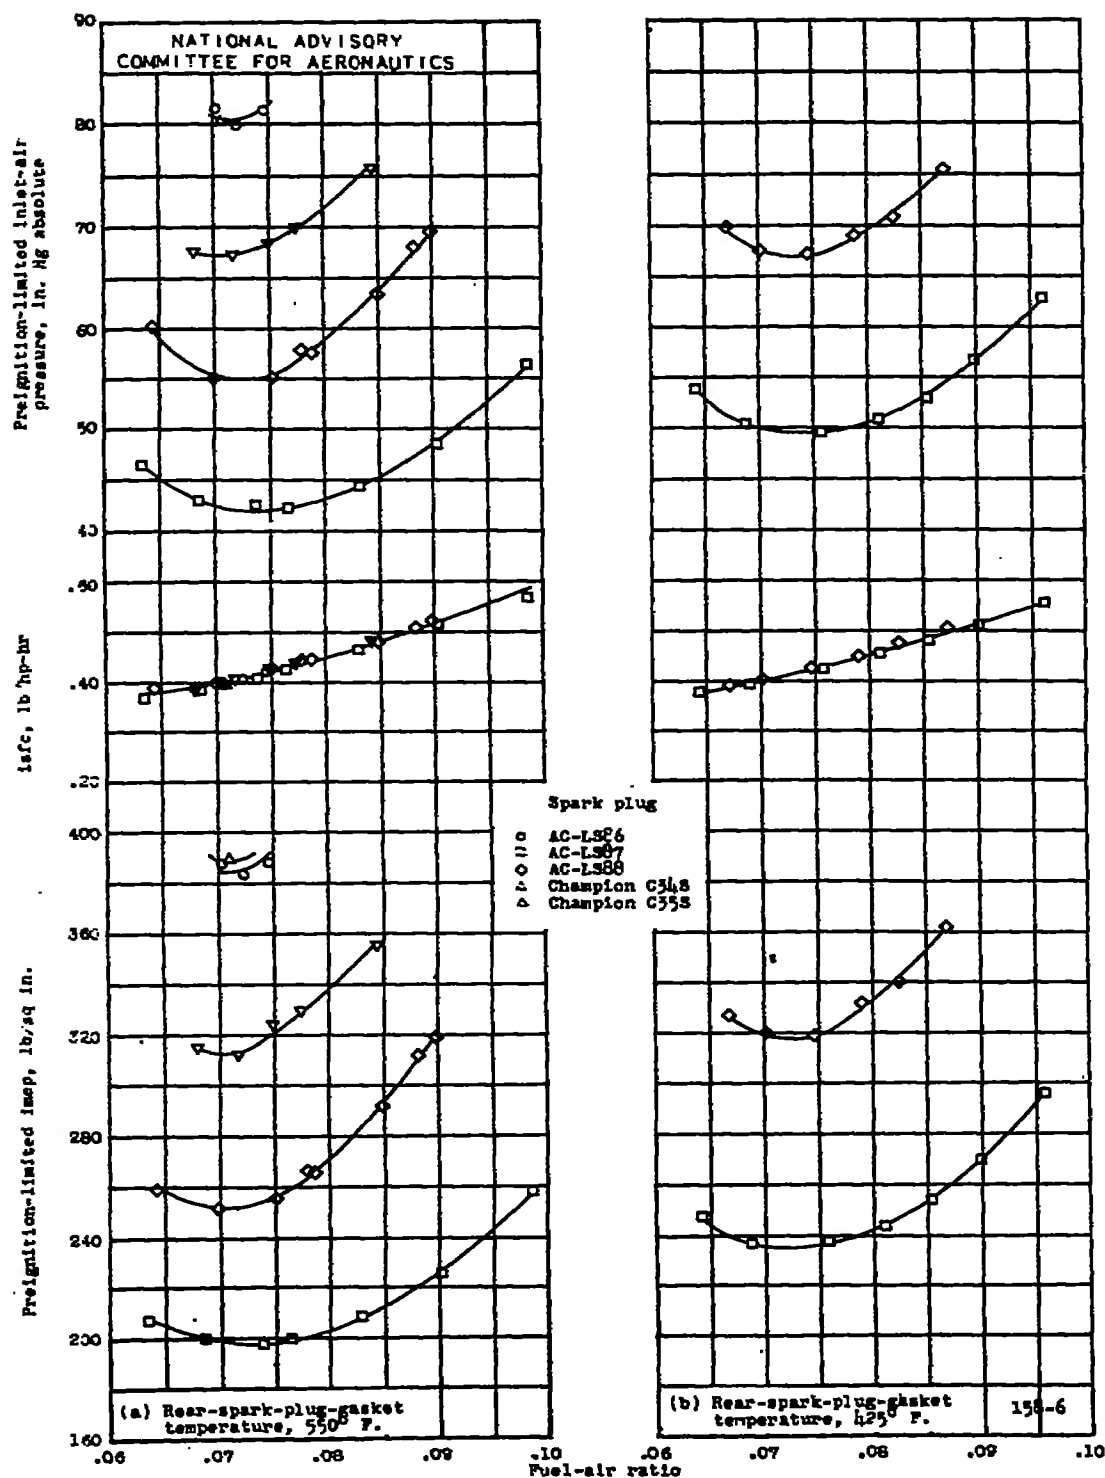


Figure 7. - Preignition-limited performance of R-2800 cylinder using five types of spark plug. Fuel, triptane + 4.0 ml TEL per gallon; compression ratio, 6.75; spark advance, 20° B.T.C.; engine speed, 2600 rpm; inlet-air temperature, 280° F.

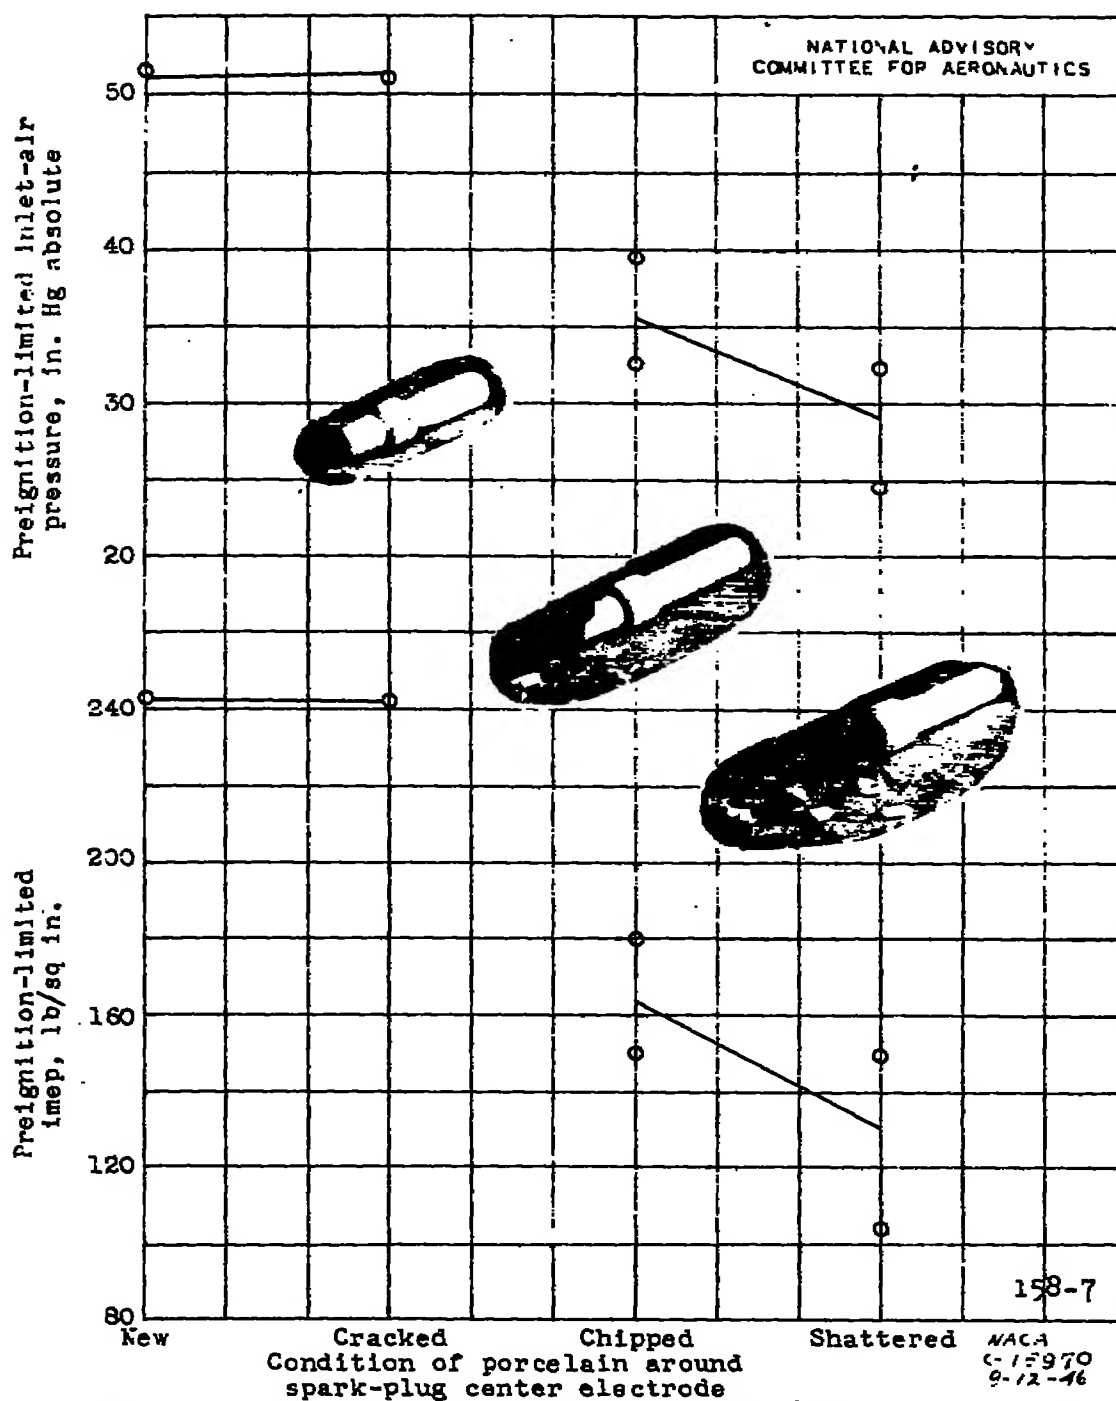


Figure 8. - Effect of condition of AC-LS87 spark plugs on pre-ignition-limited performance. R-2800 cylinder; fuel, triptane + 4.0 ml TEL per gallon; fuel-air ratio, 0.08; compression ratio, 6.75; spark advance, 20° B.T.C.; engine speed, 2600 rpm; inlet-air temperature, 260° F; rear-spark-plug-gasket temperature, 425° F.

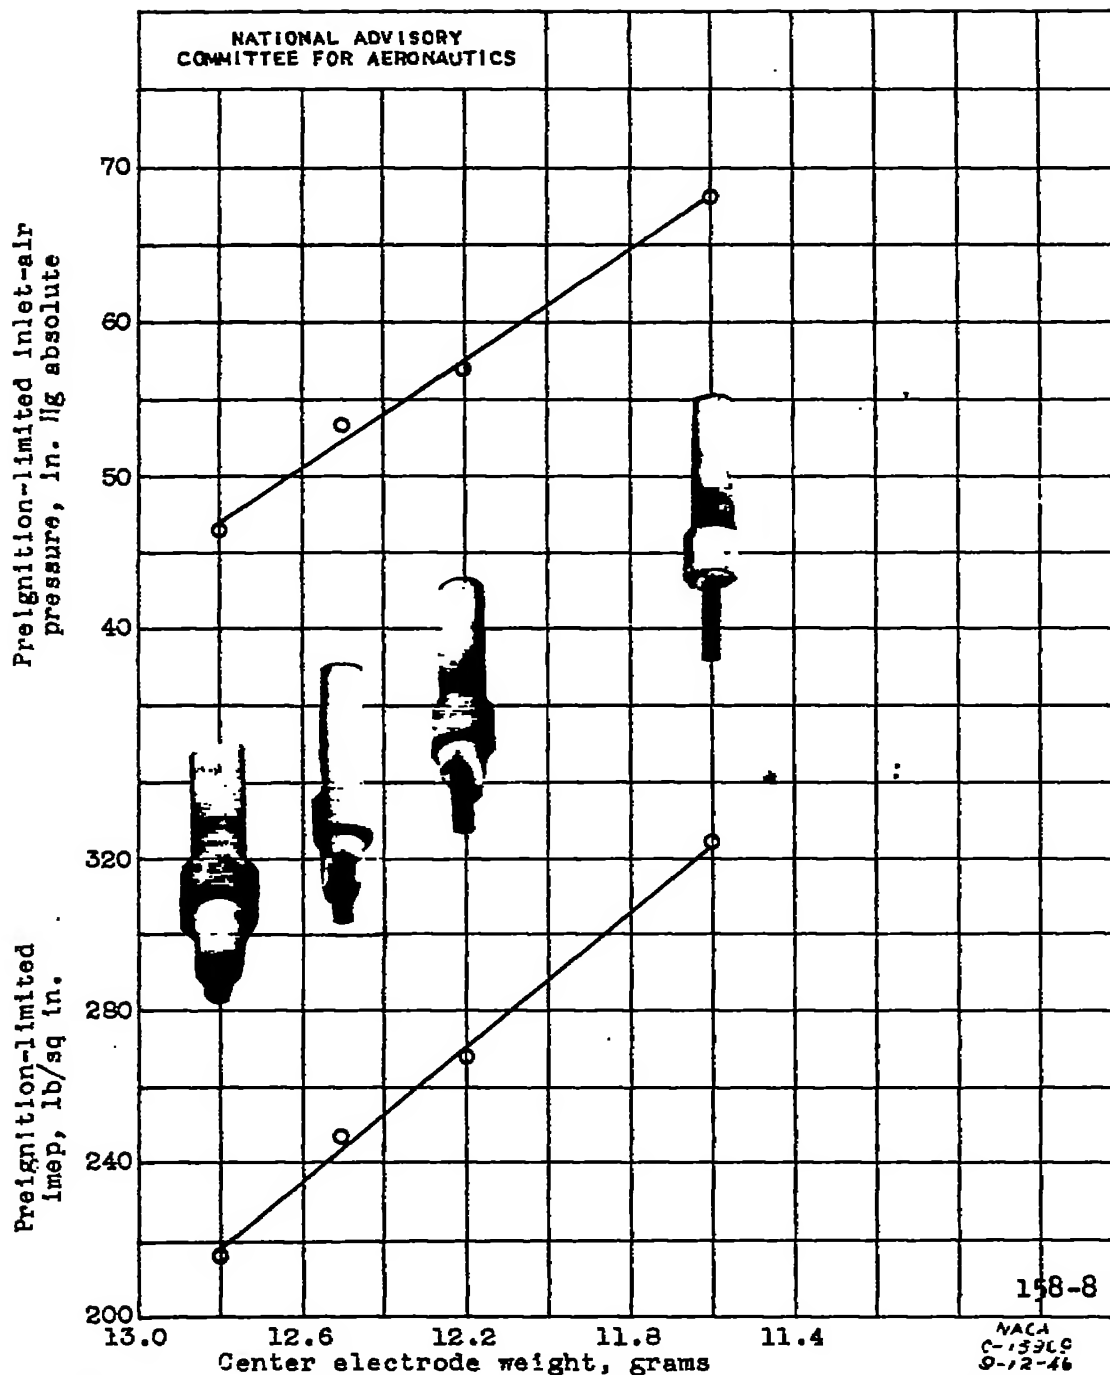


Figure 9. - Effect of porcelain removal from center electrode of AC-LS87 spark plug on preignition-limited performance. R-2800 cylinder; fuel, triptane + 4.0 ml TEL per gallon; fuel-air ratio, 0.08; compression ratio, 6.75; spark advance, 20° B.T.C.; engine speed, 2600 rpm; inlet-air temperature, 260° F; rear-spark-plug-gasket temperature, 425° F.

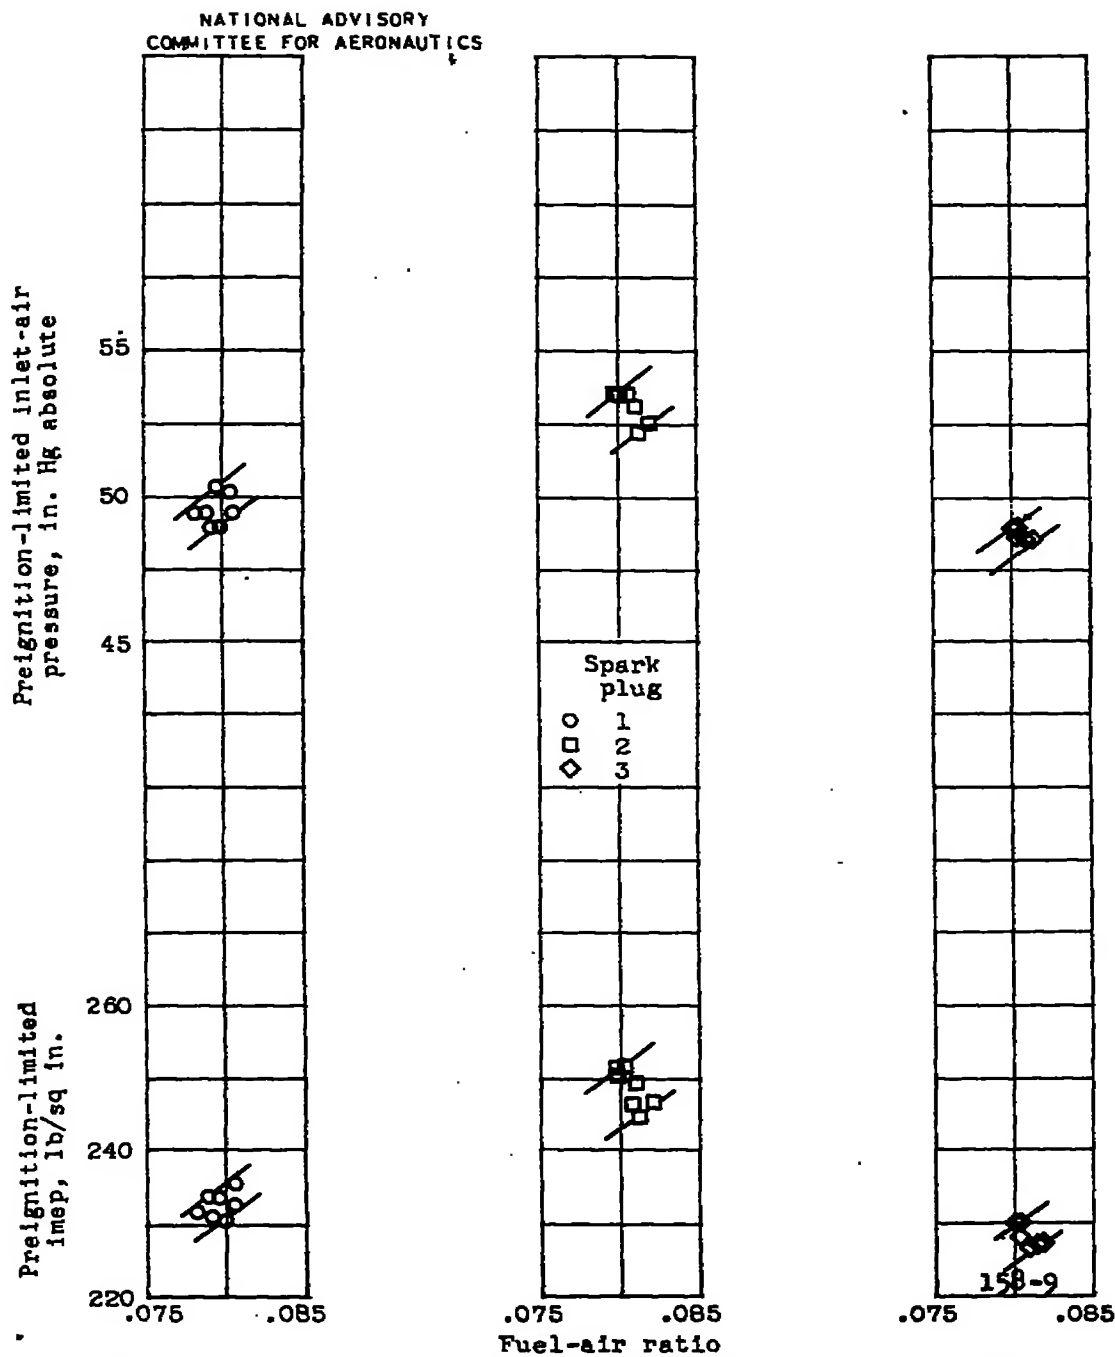


Figure 10. - Reproducibility of preignition limit with three AC-LS87 spark plugs. R-2800 cylinder; fuel, triptane + 4.0 ml TEL per gallon; compression ratio, 6.75; spark advance, 20° B.T.C.; engine speed, 2600 rpm; inlet-air temperature, 260° F; rear-spark-plug-gasket temperature, 425° F.

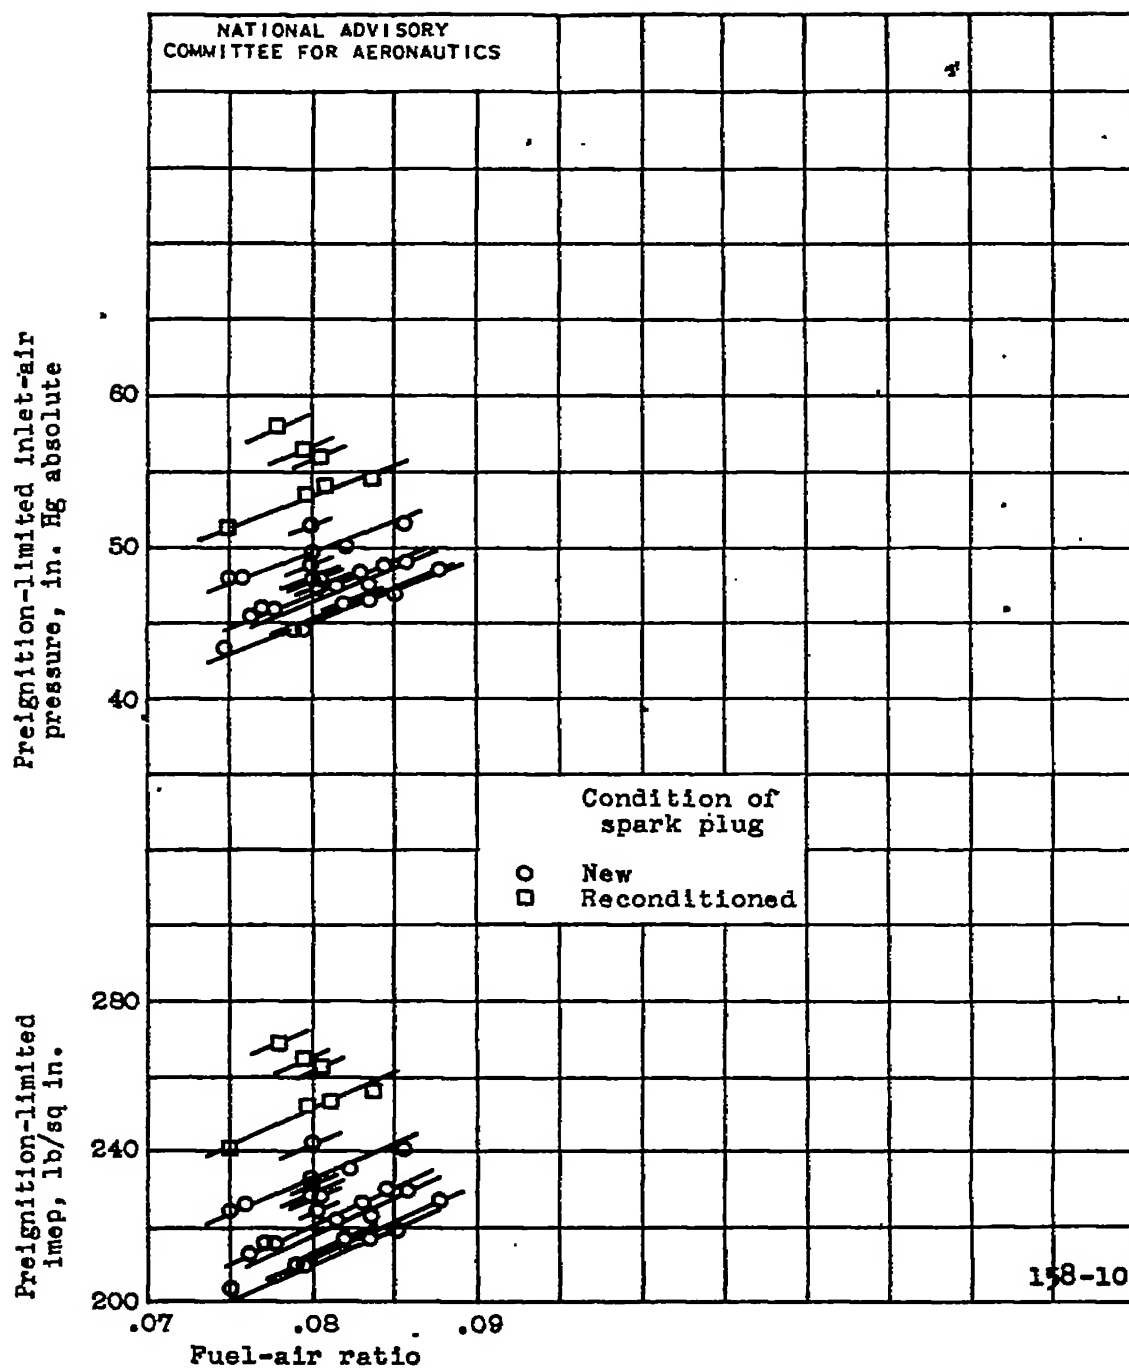


Figure 11. - Range of preignition limit of AC-LS87 spark plug.
R-2800 cylinder; fuel, triptane + 4.0 ml TEL per gallon; com-
pression ratio, 6.75; spark advance, 20° B.T.C.; engine speed,
2600 rpm; inlet-air temperature, 260° F; rear-spark-plug-gasket
temperature, 425° F.

3

Carpinus - Pondus Liberty to the end

Chapman 6382

Grinnell - Post & Whitney 67-2620-69

Food - 7 items

Th. P. B. - 212.

— *Redwood, 1911*

date - 9-16-2000

1. 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353

Goodbye - Adieu

James - Carpenter

John C. Johnson

100-3644

AC-4886

[Faint handwritten notes at the bottom of the page]

— — — — —